

**WIRELESS DESIGN
INSTANTANEOUS LIGHT
EASY INSTALL**

SERIES




SISO A/S

Mileparken 11
DK - 2740 Skovlunde (Copenhagen)
Denmark

Phone: (+45) 45 830 900
Fax: (+45) 45 830 444 - 45 830 440
E-mail: siso@siso.dk Web: www.siso.dk

- ◆ Omini can be used on the inside of any kind of cabinet. E.G. Sliding door, locker and safe etc.

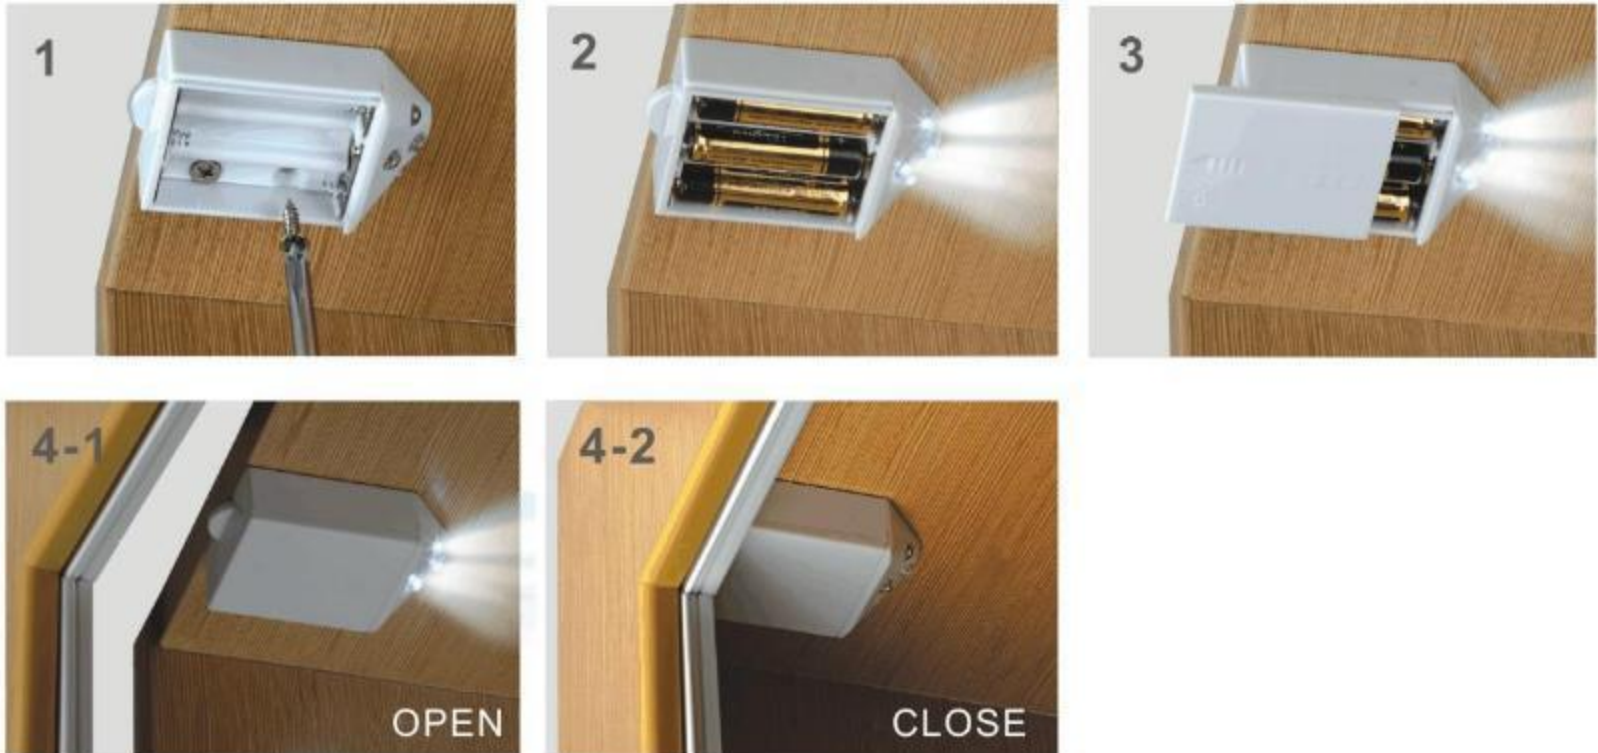

1. Align the edge of the light with the edge of the panel of the cabinet. Screw the screws into the panel in order to secure the light.
2. Place the 3 LR03 (AAA) battery into the battery cavity
3. Slide close the battery cover
4. The switch of the light is controlled by the opening and closing of the cabinet door.

1 set consist of:

- with 4 led bulbs (Led bulb lasts up to more than 50000 hours)
- 3 LR03 (AAA) Battery
- 4 screws

Item No.:

White	# 25.01.000
Black	# 25.01.101
Brown	# 25.01.102


WIRELESS DESIGN
INSTANTANEOUS LIGHT
EASY INSTALL



SISO A/S

Mileparken 11
DK - 2740 Skovlunde (Copenhagen)
Denmark

Phone: (+45) 45 830 900
Fax: (+45) 45 830 444 - 45 830 440
E-mail: siso@siso.dk Web: www.siso.dk

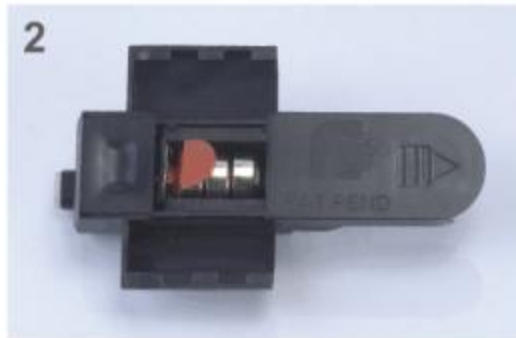

1. Align the edge of the mounting plate with the edge of the side panel. (Please note that the mounting plate needs to be installed on the same side as the full overlay hinge) There are 4 holes on the mounting plate. The first 2 holes is with the 28 mm distance and the 2 back holes is the 37 mm distance. Choose the appropriate hole and screw the screws into the side panel to secure the mounting plate onto the side panel.
 2. Slide open the battery cover and remove the red plastic strip to allow electricity flow and slide close the battery cover.
 3. Place the body of the light (With the led facing the inside of the cabinet) perpendicular at the 37 mm mark and press into the mounting plate.
 4. Slide the body forward towards the inside of the cabinet.
 5. The switch of the light is controlled by opening and closing the cabinet door.
- * 70-7505 is led light designed specifically for side panel. The mounting plate is designed to fit onto system cabinets where the hole distance is 28 mm c.c. or 37 mm c.c.

1 set consist of:

- 1 led bulb (Led bulb lasts up to more than 50000 hours)
- 1 mounting plate
- 3 pre-installed LR44 (AG13) battery
- 2 screws
- 1 pre-installed acrylic cover (These acrylic cover is available in Clear/Yellow/ Red or Blue, etc.)

Item No.:

- White** # 25.01.105
Black # 25.01.106
Brown # 25.01.107

WIRELESS DESIGN
SILENT SOFT CLOSE
EASY INSTALL



SISO A/S

Mileparken 11
DK - 2740 Skovlunde (Copenhagen)
Denmark

Phone: (+45) 45 830 900
Fax: (+45) 45 830 444 - 45 830 440
E-mail: siso@siso.dk Web: www.siso.dk



1. Align the edge of the mounting plate with the edge of the cabinet. Secure the mounting plate by screwing the screws into the cabinet.
2. Snap off the tail of the mounting plate.
3. Pull the adjustable head of the light fully down, slide the light into the mounting plate to lock light onto the mounting plate.
4. Once the light is securely locked on the mounting plate you can adjust the head of the light to your required spot.

Please note:

1. This light has a built-in soft closing function.
2. If you would like to install this light on the side panel please ensure that the light is installed on the opposite side of the hinge panel.
3. A central switch is available for you to switch off the light if not needed.
4. This light has a low battery power indication function. The light will flash to indicate that the battery power is running slow.
5. This light has a 5-minutes auto shut function. This means if you have forgotten to close your door the light will automatically switch off in 5 minutes.

1 set consist of:

- 4 led bulbs (Led bulb lasts up to more than 50000 hours)
- 1 mounting plate
- 2 LR03 Battery (AAA)
- 4 screws

Item No.:

Black # 25.01.120

Alu finish # 25.01.121

WIRELESS DESIGN
INSTANTANEOUS LIGHT
EASY INSTALL



SISO A/S

Mileparken 11
DK - 2740 Skovlunde (Copenhagen)
Denmark

Phone: (+45) 45 830 900
Fax: (+45) 45 830 444 - 45 830 440
E-mail: siso@siso.dk Web: www.siso.dk

Side Mount



Side Mount:

1. Screw mounting plate onto the side panel. Make sure that the protruding tips are facing up.
2. Clip the light into the protruding tips and push down to securely lock the light onto the mounting plate.
3. Screw the magnet onto the door on the same level as the adjustable sensor.

Top Mount



Top Mount:

1. Screw mounting plate onto the top panel; make sure the edge of the mounting plate is aligned with the edge of the cabinet. (Make sure that protruding tips is either on the left side or right side).
2. Clip the light into the protruding tips and push the light sideways to lock light onto mounting plate.
3. Adjust the adjustable sensor rod to your required length.
4. Screw the magnet onto the door on the same level as the adjustable sensor.

1 set consist of:

- with 4 led bulbs
(Led bulb lasts up to more than 50000 hours)
- 1 mounting plate
- 1 magnet with screw and washer
- 2 LR03 Battery (AAA)
- 4 screws

Please note:

1. This light can be installed onto any cabinet. (Including face frame doors)
2. A central switch is available for you to switch off the light if not needed.
3. This light has a low battery power indication function. The light will flash to indicate that the battery power is running slow.
4. This light has a 5-minutes auto shut function. This means if you have forgotten to close your door the light will automatically switch off in 5 minutes.

Item No.:

Black # 25.01.125

Alu finish # 25.01.126